

Stûv 21-clad

Wood fireplaces and inserts

Ready to install freestanding fireplaces.

The Stûv 21-clads are turnkey wood fireplaces that provide efficient heating, a refined design and the possibility of an open or closed fire. These simple and ingenious models do not need to be built into a wall and do not require any special finishing. Thanks to their steel casing, they are as simple to install as a wood stove.



Stûv, creator of the first freestanding fireplace

A fireplace that does not require any finishing on installation. The only fireplace in North America with a visible insulated chimney for a bold, contemporary look.

Single or double-sided

Stûv 21-clad wood fireplaces come in many sizes and are available in single- or double-sided models for a versatile array of architectural integrations.



Multiple integrated functions


Designed to match any decor style, Stûv 21-clad wood fireplaces include practical features such as a convection system and integrated log storage. No finishing work required.

Innovative features ensure optimal operation of a Stûv 21-clad



Integrated convection

The convection of a Stûv 21-clad wood-burning fireplace is integrated into the unit's housing, making it a simple-to-install, easy-to-use heating appliance. There is no need for hot and cold air vents as the shell has several small slits designed just for this purpose.

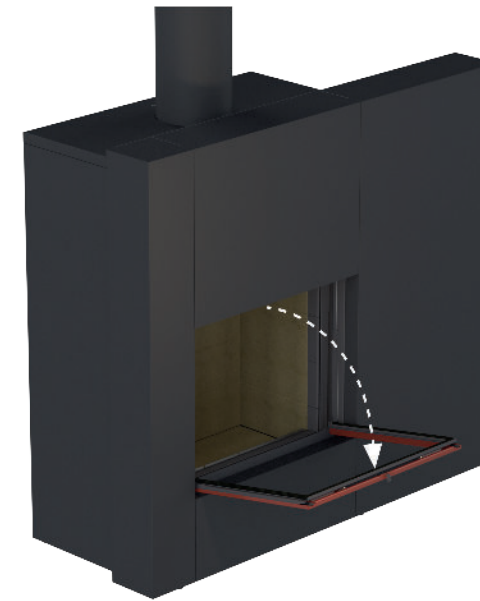


Tilting door

Once the window has been fully lowered, the door can be tilted forward to facilitate cleaning of the glass and to ensure future maintenance of the seals and other components of the Stûv 21-clad.



Invisible slides

The slides for raising or lowering the Stûv 21-clad window are placed in the door frame to facilitate access during maintenance. Their impeccable finish means that they are not visible once the wood fireplace door is raised.

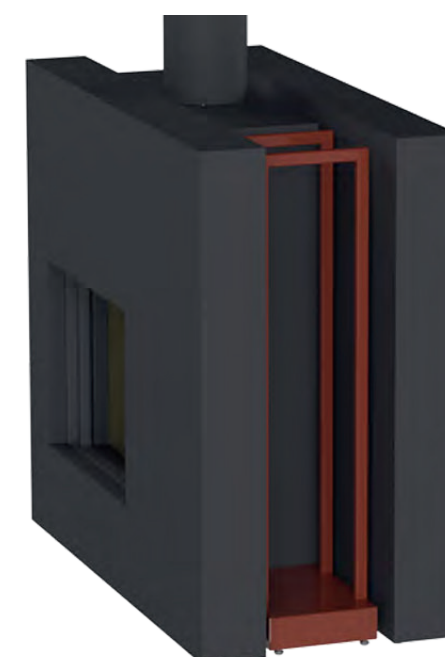

Log rack

The Stûv 21-clad is designed with log storage on the right or left - or even on both sides depending on the model.



*log rack not included



Insulated back panel

An insulated panel behind the unit allows Stûv 21-clad freestanding fireplaces to be installed directly against combustible materials. No clearance is required.

When performance enhances the fire

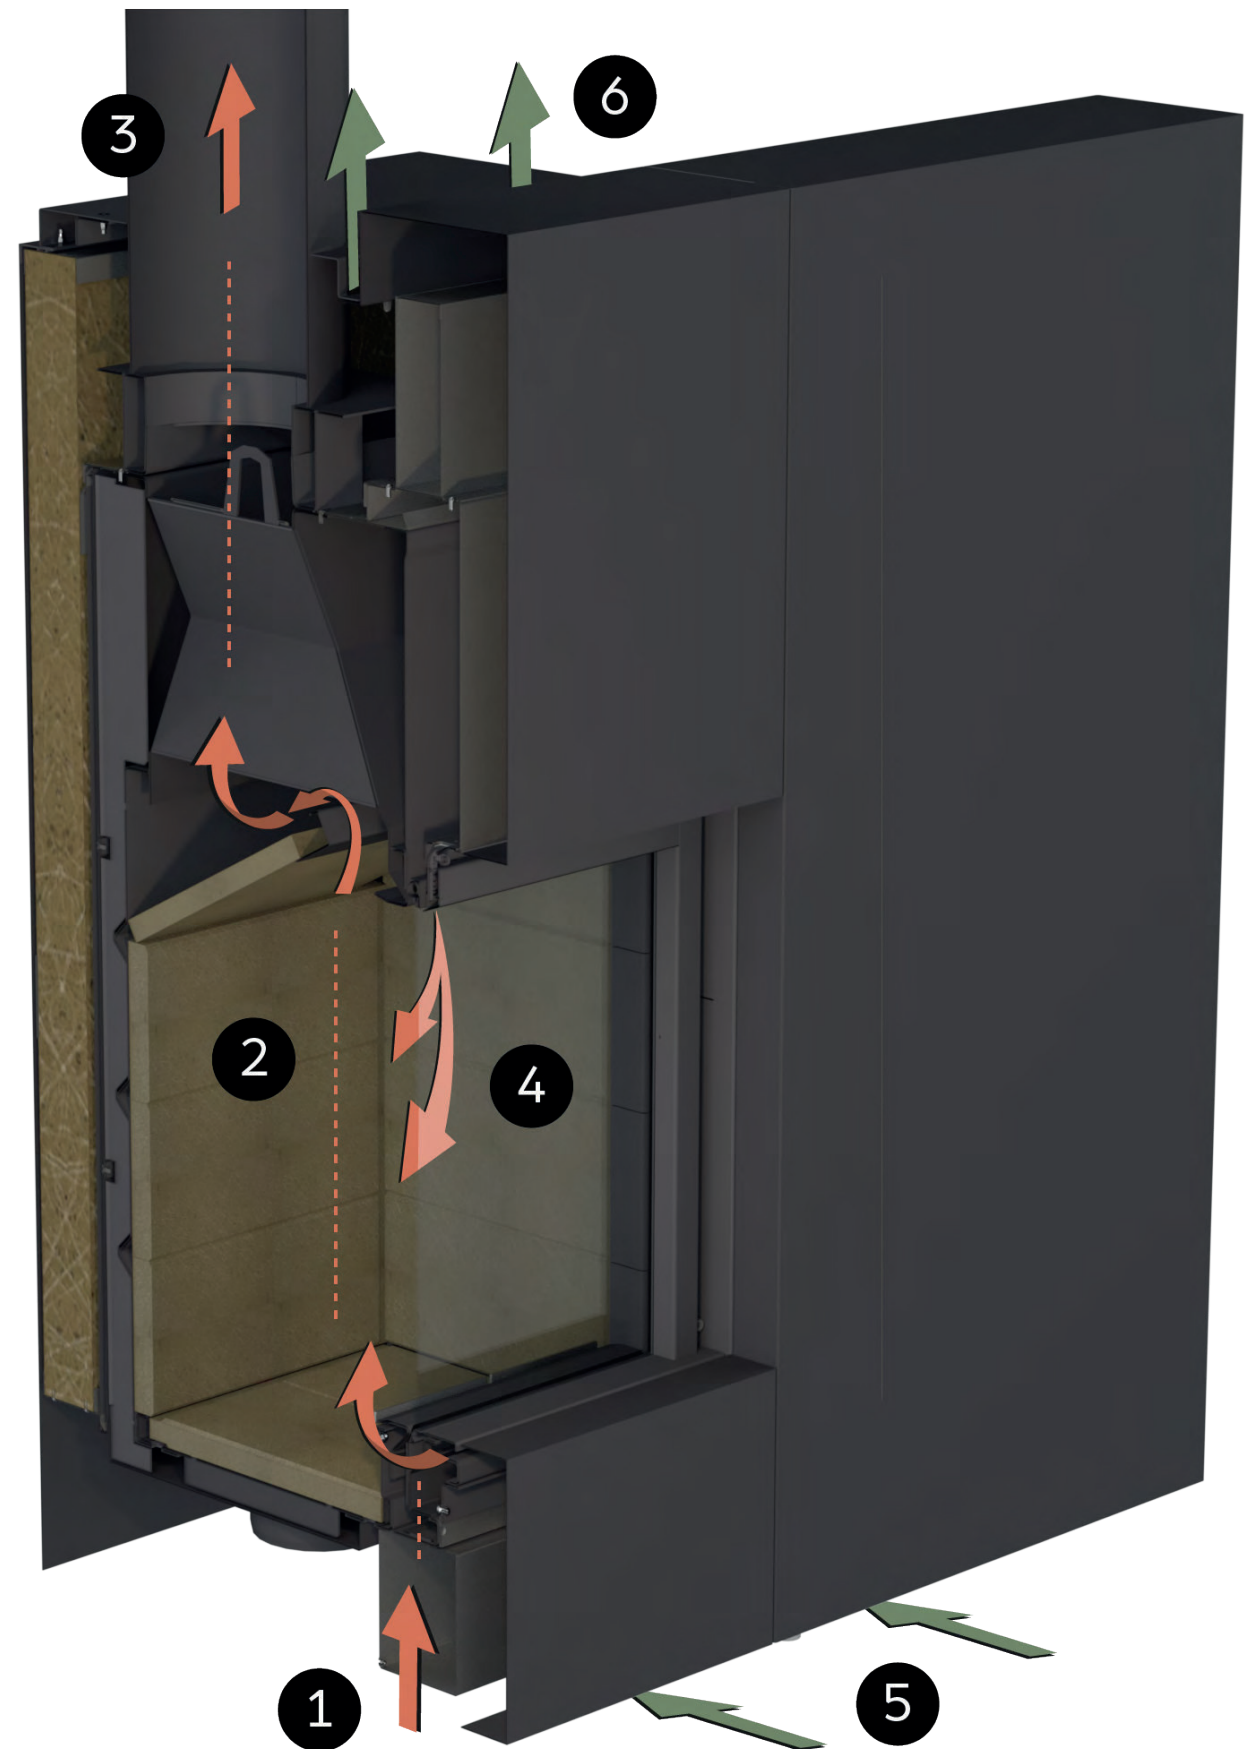

1

The air required for combustion comes directly from under the unit through an airtight box specially designed for the Stûv 21 models.

4

The sweeping air flow removes dust due to combustion from the glass providing a perfect view of the flames.

2

A deviator placed at the top of the combustion chamber constrains the smoke in order to moderate the fire and provide better combustion.

5

The air is taken from the room, the convection air circulates along the combustion chamber to absorb the heat.

3


Once the gases have burned they are evacuated through the flue pipe.

6


The heated air comes out naturally from the top of the unit and distributes a comforting warmth into the room.

Technical documents


Stûv 21-clad, offers a range of different products sizes.







Heat up to 1 800 ft² (60 000 BTU)









Tilting door for easier maintenance



Wide view of the fire

Stûv 21-clad simple face 2	Model	Nominal heat output*	Heating surface area	Firebox size	Weight
	21-85 SF2	44 000 BTU/h	1 400 ft²	4.8 ft³	775 lb
	21-95 SF2	43 000 BTU/h	1 600 ft²	6.6 ft³	925 lb
	21-105 SF2	65 000 BTU/h	1 400 ft²	5.3 ft³	765 lb
	21-125 SF2	60 000 BTU/h	1 800 ft²	8.4 ft³	975 lb

*These nominal heat outputs were obtained according to a European testing protocol. For additional information on powers, please see: <https://stuvamerica.com/en/inspirations/tips-and-techniques/power-btu/>

Stûv 21-clad double face 2	Model	Nominal heat output*	Heating surface area	Firebox size	Weight
	21-85 DF2	48 000 BTU/h	1 400 ft²	6.5 ft³	885 lb
	21-95 DF2	50 000 BTU/h	1 600 ft²	8.4 ft³	1 055 lb
	21-125 DF2	61 000 BTU/h	1 800 ft²	10.6 ft³	1 100 lb
Stûv 21-clad double face 7	Model	Nominal heat output*	Heating surface area	Firebox size	Weight
	21-85 DF7	48 000 BTU/h	1 400 ft²	6.5 ft³	975 lb
	21-95 DF7	50 000 BTU/h	1 600 ft²	8.4 ft³	1 145 lb
	21-125 DF7	61 000 BTU/h	1 800 ft²	10.6 ft³	1 200 lb

*These nominal heat outputs were obtained according to a European testing protocol. For additional information on powers, please see: <https://stuvamerica.com/en/inspirations/tips-and-techniques/power-btu/>

Finishings



Stûv 21-clad log rack

The log racks are specially designed to be placed behind the facings of the Stûv 21-clad. Their sturdiness offers a large storage capacity.



Fire screen

Used when the retractable glass door is open, it allows you to enjoy the open fire safely.



Mobilobox


This small mobile box is not only easy to handle, but it also has an integrated storage for firewood, matches and fire starters.

Accessories




Airtight Box

This steel box allows the outside air intake from outside the house to be connected directly to the combustion chamber of the wood fireplace.

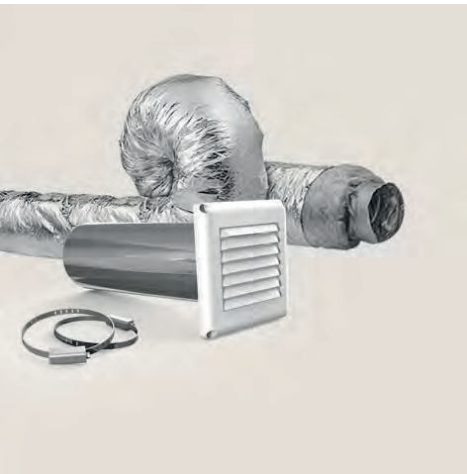

Connection kit for outdoor air intake

This kit connects the outside air intake to the appropriate connector for each unit. It includes a 4" diameter, 12' long insulated duct and a white grill.

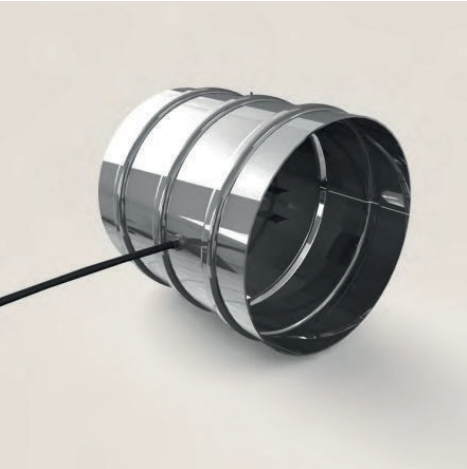


Air damper


This damper prevents outside air from coming into the house when the unit is not in use. This accessory is strongly recommended for very airtight home standards. Available in 4 or 6 in.

Several colours available

Grey RAL 9007



White RAL 9010



StûvGrey



StûvBlack



Unique rust finish

This look is obtained through a natural oxidation process in an outdoor environment. The process is stopped once a nice rusted look has been obtained. This means every piece is unique!

Rust Finish

