


Stûv 21.2-clad DF7

Technical sheet

stûv
AMERICA

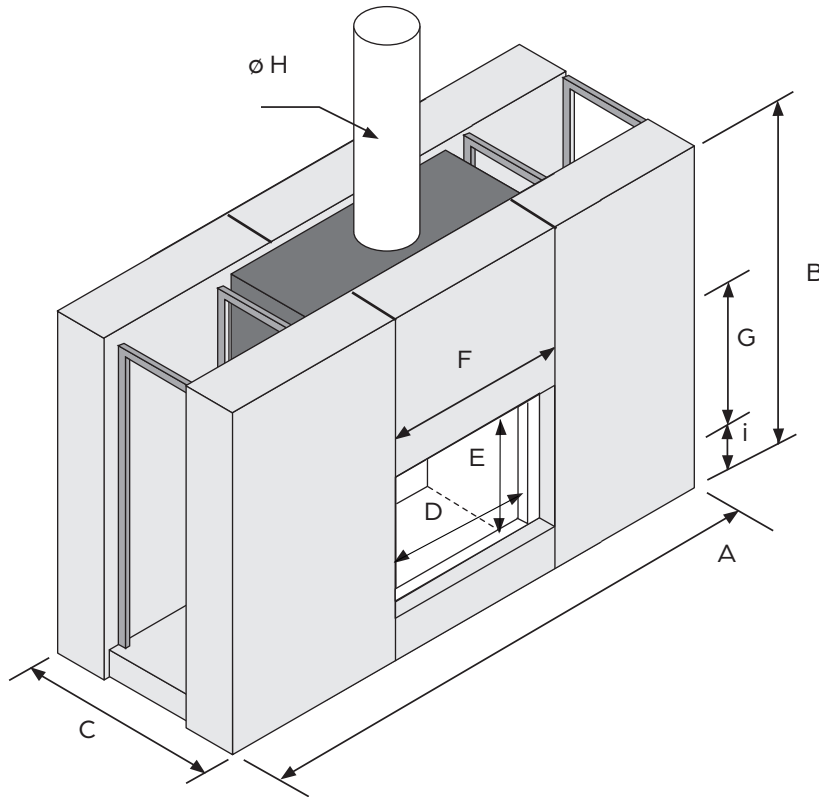

ADVANTAGES

- Quick and easy installation
-
- Hybrid – Ambiance fire or auxiliary heating
-
- Integrated convection system
-
- Can be connected to outside air
-
- Accessible mechanical components
-
- High heating power
-
- Easy to light
-
- Generates little ash
-
- No finishing work required
-
- Wide view of the fire
-
- Easy to maintain

Available colors



*These nominal heat outputs were obtained according to a European testing protocol.

For additional information on powers, please see: <https://stuvamerica.com/en/inspirations/tips-and-techniques/power-btu/>

** Approximate weight includes fireplace and cladding

Dimensions for information only. See the installation manuals for details.




Size	21.2-85 DF	21.2-95 DF	21.2-125 DF
Maximum length of logs	24"	28"	40"
Nominal heat output*	48 000 BTU/h	50 000 BTU/h	61 000 BTU/h
Heating surface area	1 400 ft ²	1 600 ft ²	1 800 ft ²
Firebox size	6.5 ft ³	8.4 ft ³	10.6 ft ³
Outside air duct	ø 6"	ø 6"	ø 6"
Weight**	975 lb	1 145 lb	1 200 lb
A – Width	86"	89 15/16"	101 5/8"
B – Height	63 7/8"	70 1/4"	63 7/8"
C – Depth	33 1/2"	33 1/2"	33 1/2"
D – Glass width	26 1/2"	30 3/8"	42 1/8"
E – Glass height	21 1/16"	24 1/4"	21 1/16"
F – Opening width	30 3/4"	34 7/8"	46 1/2"
G – Opening height	23 3/4"	26 15/16"	23 3/4"
H – Chimney diameter	10"	12"	12"
i – Height to opening	12 3/4"	12 3/4"	12 3/4"


LOG RACKS

FINISHING ACCESSORIES


WARNING: The log racks are **NOT** equipped with wheels and **are sold separately**.



SF2 log rack
21-85 clad, 21-95 clad et 21-125 clad
17 $\frac{3}{16}$ " W x 58 $\frac{3}{16}$ " H x 19 $\frac{1}{16}$ " D



SF2 log rack
21-105 clad
15 $\frac{3}{8}$ " W x 52 $\frac{9}{16}$ " H x 19 $\frac{1}{16}$ " D



DF2 / DF7 log rack
21-85 clad DF, 21-95 clad DF et 21-125 clad DF
13 $\frac{3}{8}$ " W x 58 $\frac{3}{16}$ " H x 19 $\frac{1}{16}$ " D

AVAILABLE COLORS



StûvGrey



StûvBlack



Rust